


LF-A1-240U105A/C

Programmable IP67 Isolated LED Driver | Constant Current - Dimmable

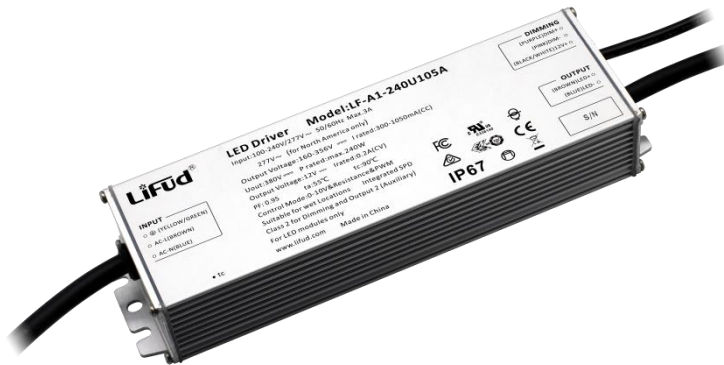

Product family features

- THD<10% @60% load, 277Vac
- Rated input voltage: 108-277Vac
- Ta: -40~+55°C
- Ripple current <3%
- 3-in-1 dimming + time dimming + 12V AUX output, 3-in-1 dimming + time dimming (optional)
- Standby power consumption ≤0.5W
- All-round protections: short circuit, open circuit, over-temperature
- IP67, suitable for Class I light fixtures
- 5 years guarantee

Product family benefits

- High efficiency
- Flicker free
- Long lifetime and high reliability
- Isolated

Typical applications

- For shoebox light, flood light, street light and tunnel light
- For street lighting

Product parameters

- Output current 300-1050mA
- Output power 48-240W
- Input voltage 108-277Vac
- Output voltage 160-356Vdc
- Efficiency 94.5%

Electrical data

Input data

Rated supply voltage	100...240V/277V
AC voltage range	90 ... 305V
Rated Input voltage DC	141 ... 391V
DC voltage range	127 ... 391V
Mains frequency	50/60Hz
Power factor	0.9/277Vac @60 load
Current tolerance	$I_o \geq 600\text{mA} \pm 5\%$; $< 600\text{mA} \pm 35\text{mA}$
Linear adjustment rate	$\pm 5\%$ @full load
Load adjustment rate	V_o : 160-356Vdc $\pm 5\%$
Efficiency in max. power	93.5% ¹⁾
Input current	3.0A Max
Inrush current	100A ²⁾
Loading number on circuit breaker 10 A (B)	4
Loading number on circuit breaker 10 A (C)	6
Loading number on circuit breaker 16 A (B)	7
Loading number on circuit breaker 16 A (C)	11
Leakage current	$\leq 0.7\text{mA}$
Standby power consumption	$\leq 0.5\text{W}$ @220Vac/50Hz Dim to off

Output data

Nominal output voltage	160... 356V
Nominal output current	300 ... 1050mA
Default output current	700mA $\pm 5\%$
Current set	Programming
Maximum output power	240W Max @108-277Vac
Nominal output power	48... 240W
Output ripple current (100 Hz)	$< 3\%$ @ $\leq 120\text{Hz}$
Flicker	According to IEEE Std 1789-2015
CIE SVM	≤ 0.4
IEC-Pst	≤ 1
Temperature tolerance	$\pm 10\%$ @25°C~55°C
Start-up time	230Vac $< 0.6\text{S}$ @full load
THD	THD $\leq 10\%$ @60% load Single harmonic: harmonic-C $\geq 60\%$ load/230Vac
Device power loss	/

12V AUX

Output voltage	+12Vdc (11-14Vdc)
Output current	200mAmax.
Dynamic load	Please make sure that it matches the LED driver.
Ripple voltage	$\leq 1\text{V}$


Safety

Withstanding voltage	I/P-O/P, I/P-DIM: 3.15kV&5mA&60S; I/P-PE, DIM-PE, DIM-O/P: 1.5kV&5mA&60S; O/P-PE: 0.5kV&5mA&60S
Surge capability (L-N)	6 kV (2Ω)
Surge capability (L/N-Ground)	10 kV (12Ω)
Insulation resistance	I/P-PE, I/P-O/P, O/P-PE, I/P-DIM, O/P- DIM, DIM-PE: >100MΩ@500VDC
Guarantee	5 years ³⁾


- 1) @output current 1050mA, output voltage 228V, @230Vac
- 2) t =350 μs
- 3) 5year @tc≅80°C

Characteristic diagram


Power vs Load

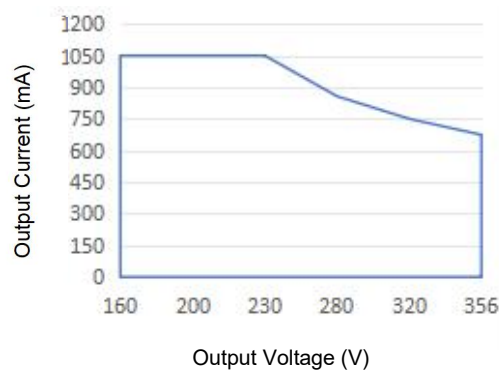


Typical Efficiency vs Load

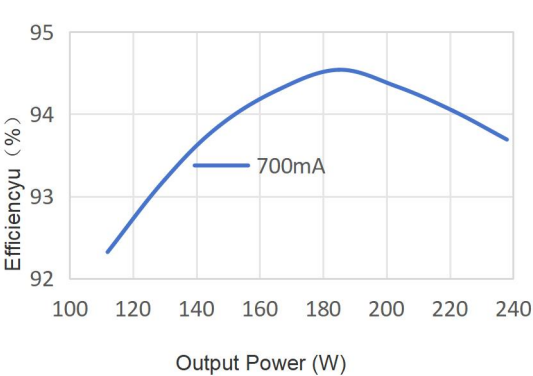


Typical Power Factor vs Load

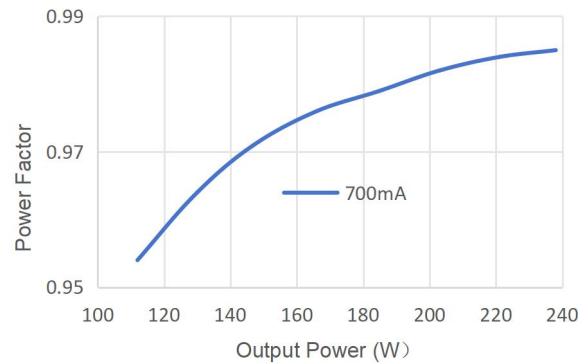


Typical THD vs Load

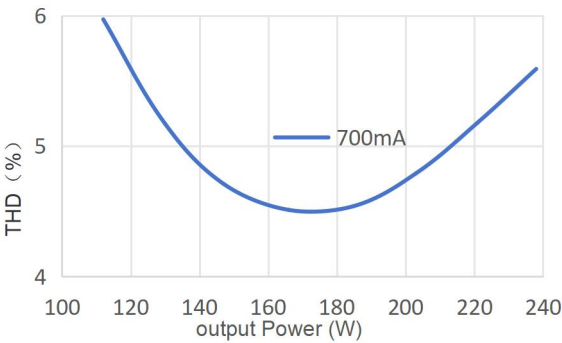

Load Derating Curve

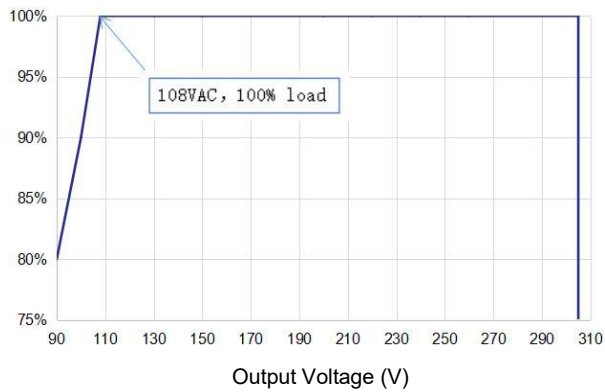

Lifespan

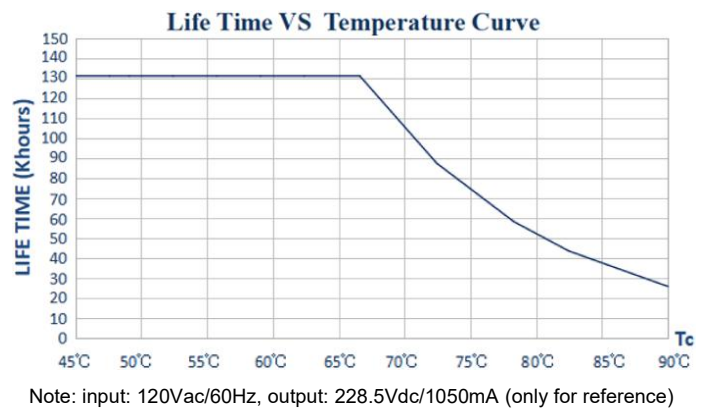


Dimming function instructions

Parameter	Min.	Typ.	Max.	Note
Output current range set via programmer	300mA	700mA	1050mA	Total output power ≤240W

0-10V Dimming Operation


- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is $0.8V \pm 0.15$, the light turns off; when it's $1.0V \pm 0.15$, the light turns on.
- DIM+/- (without signal connected): 100% rated current output

Wiring Diagram of 0-10V Dimming

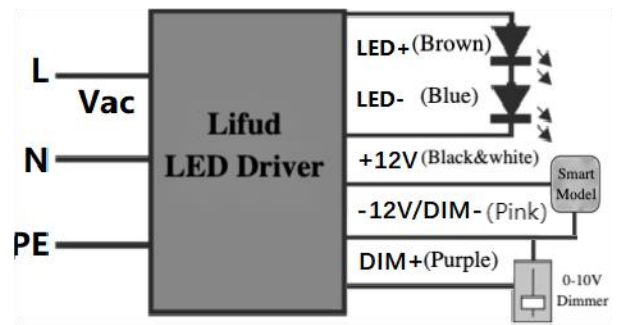

This diagram is only for A version; C version has no 12V+.


Dimming Curve

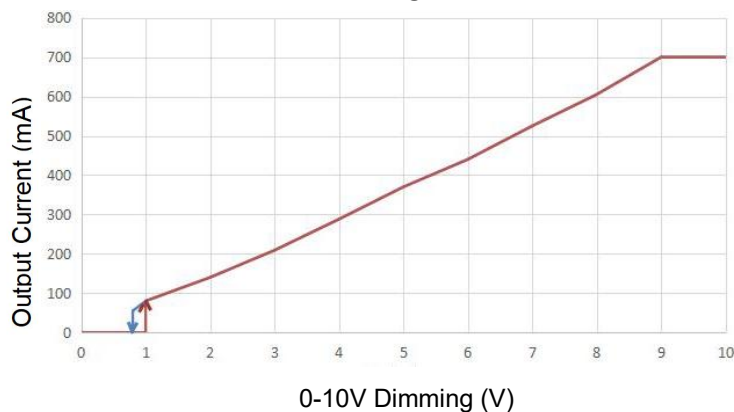


Input: 230Vac; output: 342Vdc/700mA(0-10V dimming depth typical value 10%) (this data is measured by Lifud 0-10V dimmer and the chart is for reference only)

PWM Dimming Operation

- Connect PWM signal to the DIM terminal.
- Compatible signal range: 1000-2000(Hz), amplitude: 9-10(V)
- DIM+/- (without signal connected): 100% rated current

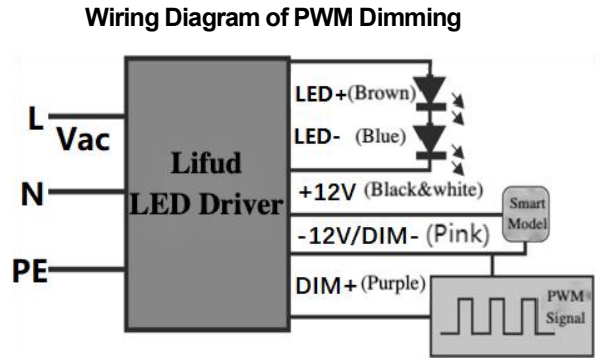


This diagram is only for A version; C version has no 12V+.

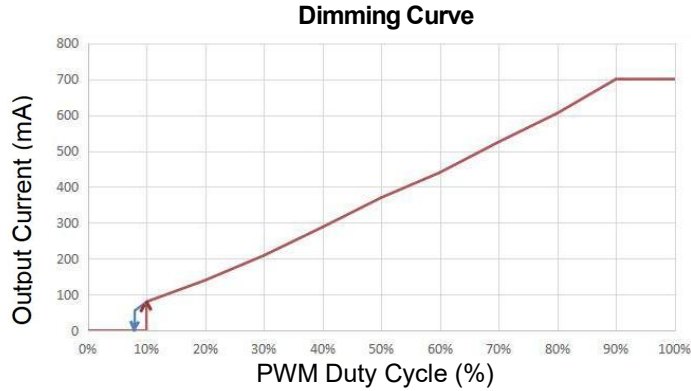


Input: 230Vac; output: 342Vdc/700mA(PWM dimming depth typical value 10%) (this data is measured by Lifud PWM signal generator Tektronix and the chart is for reference only)

Rx Dimming Operation

- Connect Rx signal to the DIM terminal.
- Range: 0-100KΩ
- DIM+/- (without signal connected): 100% rated current

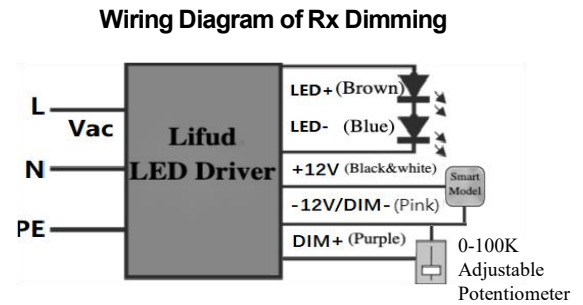

This diagram is only for A version; C version has no 12V+.

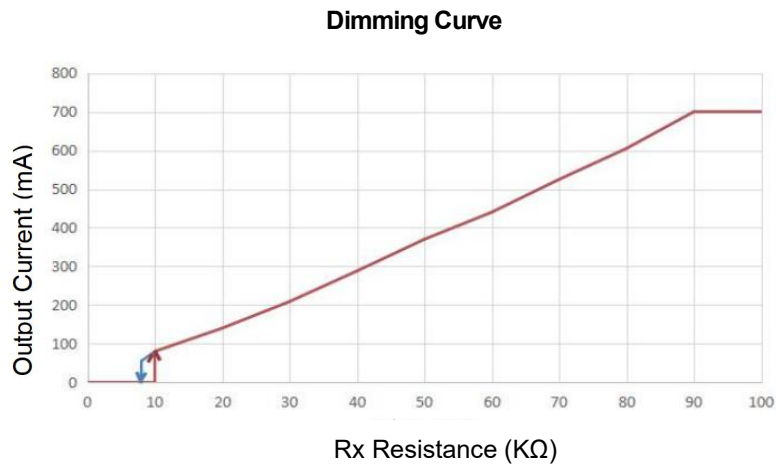


Input: 230Vac; output: 342Vdc/700mA(Rx dimming depth typical value 10%) (this data is measured by resistor dimmer and the chart is for reference only)

Programmer tools and software


Product	Name	Brand	Model	Software
	Lifud programmer	LIFUD	LF-SCS080C	LF-PRG

Wiring diagram of Rx dimming

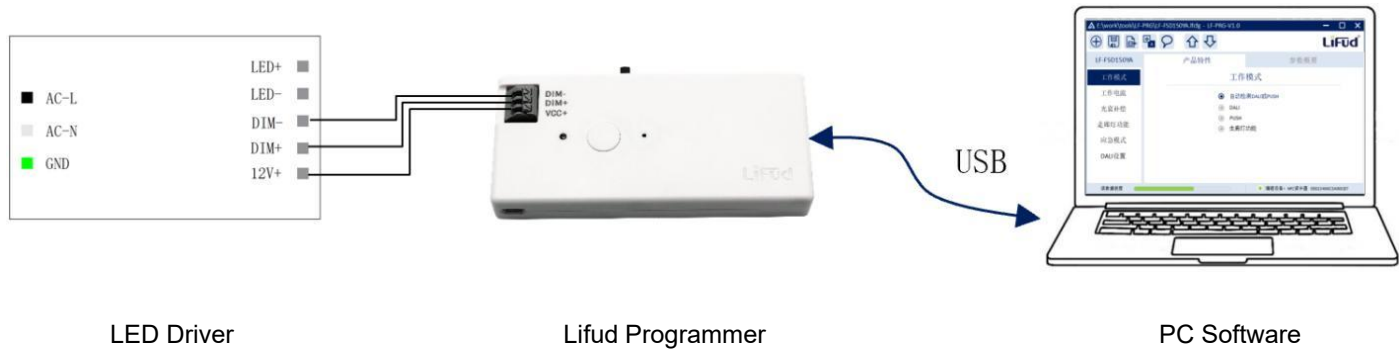


Time dimming function

Time dimming mode: there are 6 steps in total. You can set the brightness of each step and the operating time of the first to fifth steps.

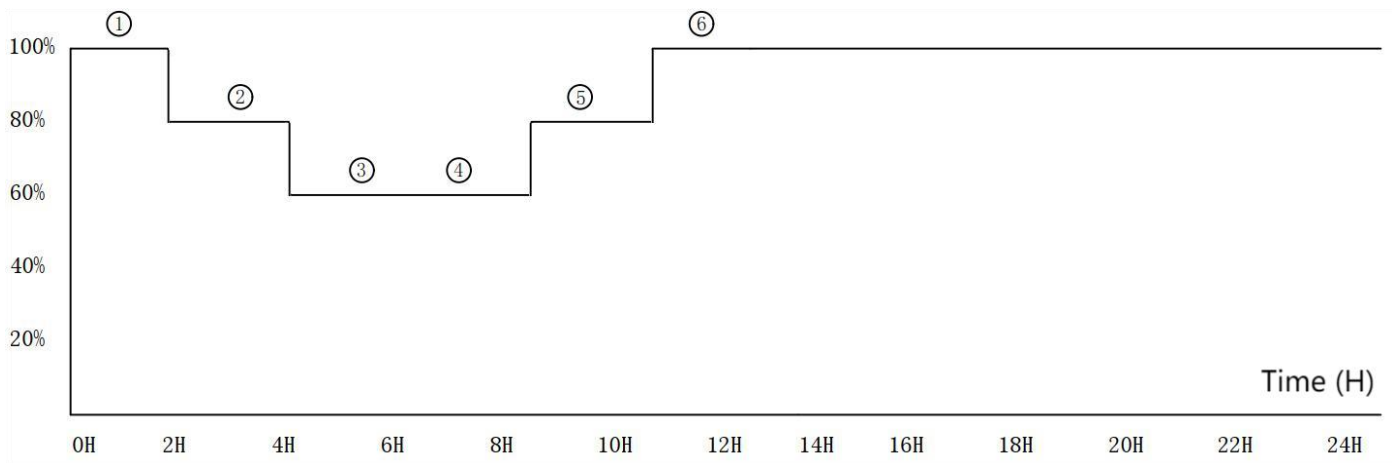

Note: In the time dimming mode, after the power is turned on, it will work according to the set dimming curve.

Dimensions

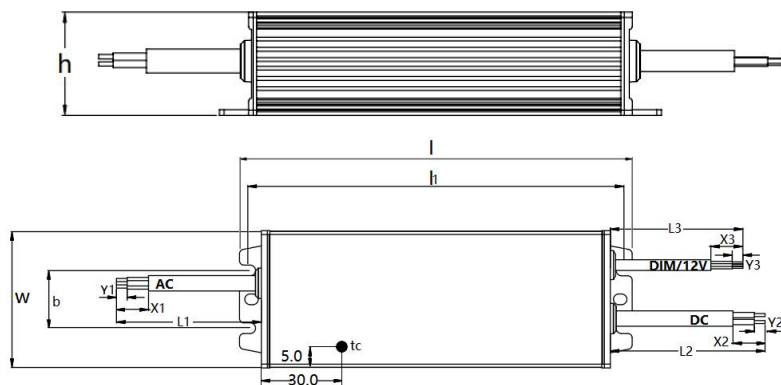

Note: this diagram is a front view and Tc point is on the front side of the driver.

Mounting hole spacing, length	212.6mm
-------------------------------	---------

Mounting hole spacing, width	27mm
Product weight	1030g
Wire type, input side	3*1.0mm ² ϕ 8.2 $\pm$ 1mm
Wire type, output side	2*1.0mm ² ϕ 7.7 $\pm$ 1mm
Wire type, dimming and AUX side	3*22AWG ϕ 5.0 $\pm$ 0.2mm
Wire color, input side	AC-L Brown; AC-N Blue; PE Yellow&green
Wire color, output side	LED+ Brown; LED- Blue
Wire color, dimming and AUX side (only for A version)	DIM+ Purple; DIM- Pink; +12V Black&white
Wire length, input side (L1)	300 $\pm$ 10mm
Wire length, output side (L2)	230 $\pm$ 10mm
Wire length, dimming and AUX side (L3)	220 $\pm$ 10mm
Wire peeled length, input side (X1)	40 $\pm$ 4mm
Wire peeled length, output side (X2)	36 $\pm$ 4mm
Wire peeled length, dimming and AUX side (X3)	40 $\pm$ 4mm
Wire tinned length, input side (Y1)	10 $\pm$ 1.5mm
Wire tinned length, output side (Y2)	8 $\pm$ 1.5mm
Wire tinned length, dimming and AUX side (Y3)	10 $\pm$ 1.5mm
Length (l)	222.6 $\pm$ 0.5mm
Width (w)	64.2 $\pm$ 0.5mm
Height (h)	38 $\pm$ 0.5mm

Colors & materials

Casing material	Metal
Casing color	Silver gray

Temperature & operating conditions

Ambient temperature range	-40°C - +55°C
Maximum temperature at tc test point	90°C
Temperature range at storage	-40°C - +80°C (6 months in Class I environment)
Humidity range at storage	10-90%RH (no condensation)
Humidity during operation	20-90%RH
Atmospheric pressure	86-106KPa
RoHS	RoHS 2.0 (EU) 2015/863

Capabilities

Dimmable	0-10V/PWM/Rx dimmable
Open-circuit protection	Open circuit voltage $\leq$ 380Vdc
Overheating protection	When Tc is 95°C $\pm$ 5°C, it will reduce the current and auto-recover when the Tc decreases to the normal temperature.
Overload protection	/
Short-circuit protection	The LED driver will recover by itself and will not be damaged even in the state of short circuit for a long time. (Auto-recovery)

Max. cable length to lamp/LED module	/
Suitable for fixtures with prot. class	I
Control interface	/
Number of channels	1 channel


Programming

Programmer	LF-SCS080C
DALI Control Software	/
APP	LF-PRG

Certificates & standards

Approval marks – approval	ENEC, CE, CB, RCM, UL, FCC
Standards	IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384, AS 61347.1, AS 61347.2.13 UL 8750 CSA C22.2 no.250.13
EMC	EN 55015, EN 61547, EN 61000-3-2,3 FCC: PART 15 CLASS B @120Vac FCC: PART 15 CLASS A @277Vac
Ring wave	5kV
Group pulse	5kV (Class B)
ESD	Air 8kV, touch 4kV
Type of protection	IP67

Heat dissipation instruction

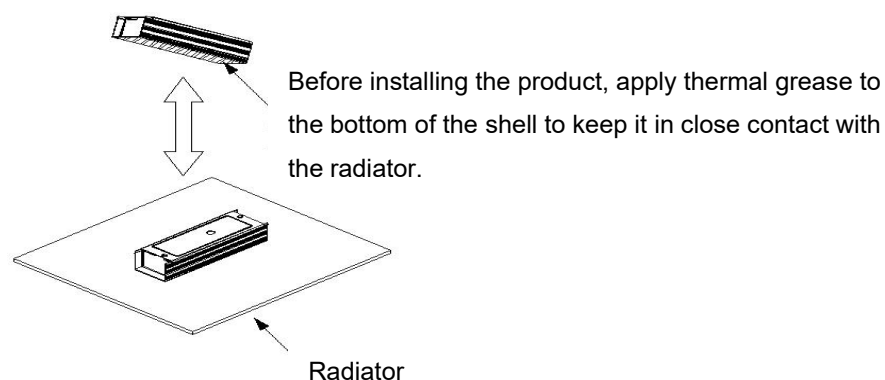

Note: When in use, it is recommended to apply thermal grease between the LED driver and the lamp radiator shell to ensure their close contact, and the T_c point temperature cannot exceed +90℃. The installation method is as shown above.

Logistical data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-A1-240U105A/C	12	446 mm*332 mm*167 mm	24.73dm ³	13.85kg±5%

Test equipment & condition

Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
----------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25℃, humidity of 50%, full load and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. The test conditions of circuit breaker configuration quantity should be consistent with the ones of surge current.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. When using the LED driver, please pay attention that the total output power not exceed the maximum rated output power, otherwise the warranty service of LED driver would be failed.
6. When conducting withstanding voltage test on LED driver, please short-circuit the input wire L and N; the positive electrode and negative electrode of the output wire; the positive electrode and negative electrode of the dimming wire and AUX power supply.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.