

Module QLE G3 520x246mm 2500lm ADV-SE

Modules QLE advanced

**Product description**

- _ Ideal for linear and panel lights
- _ Perfectly uniform light, even if several LED modules are used together in a line
- _ Self-cooling (no additional heat sink required)
- _ Push terminals for quick and simple wiring of LED module to LED module
- _ Min. order quantity: 2 pcs. (one package contains 2 modules)
- _ Long lifetime: 60,000 hours
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacture-guarantee-conditions>)

Optical properties

- _ Colour temperatures 3,000, 4,000, 5,000 and 6,500 K
- _ Useful luminous flux 2,490 lm at Irated and tp = 25 °C
- _ Efficacy of the LED module 181 lm/W at Irated and tp = 25 °C
- _ High colour rendering index CRI > 80
- _ Small colour tolerance (MacAdam 3) ^①
- _ Small luminous flux tolerances

Mechanical properties

- _ Module dimension 520 x 246 mm
- _ Simple installation (e.g. screws)

System solution

- _ Combine Tridonic's LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)

^① Integral measurement over the complete module.

Website

<http://www.tridonic.com/28004934>



Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

Module QLE G3 520x246mm 2500lm ADV-SE

Modules QLE advanced

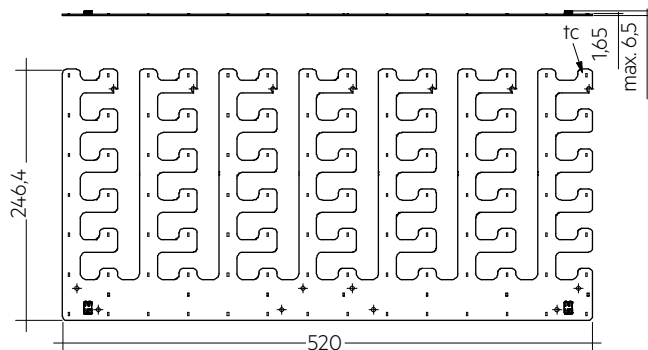

Details see data sheet 3.4 Mounting instructions

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
QLE G3 520x246mm 2500lm 830 ADV-SE	28004934	3,000 K	20 pc(s).	0.187 kg
QLE G3 520x246mm 2500lm 840 ADV-SE	28004935	4,000 K	20 pc(s).	0.187 kg
QLE G3 520x246mm 2500lm 850 ADV-SE	28004936	5,000 K	20 pc(s).	0.187 kg
QLE G3 520x246mm 2500lm 865 ADV-SE	28004937	6,500 K	20 pc(s).	0.187 kg

Technical data

Beam characteristic	120°
Ambient temperature t_a	-25 ... +45 °C
t_p rated	45 °C
t_c	85 °C
I_{rated}	350 mA
I_{max}	660 mA
Max. permissible LF current ripple	860 mA
Max. permissible peak current	1,400 mA / max. 10 ms
Max. working voltage for insulation [®]	420 V
Insulation test voltage	1.8 kV
Colour tolerance	3 SDCM
ESD classification	Severity level 1
Risk group (IEC 62471)	RG1 (660 mA (I_{max}))
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	60,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks



Standards

IEC 62031, IEC 62471, IEC 61000-4-2, IEC 62778, IEC 61547

Specific technical data

Type [®]	Article number	Photometric code ^②	Useful luminous flux at tp = 25 °C ^③	Expected luminous flux at tp rated ^④	Typ. forward current	Min. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^⑤	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE											
QLE G3 520x246mm 2500lm 830 ADV-SE	28004934	830/359	-	2,030 lm	300 mA	33.2 V	40.0 V	-	-	176 lm/W	>80
QLE G3 520x246mm 2500lm 840 ADV-SE	28004935	840/359	-	2,180 lm	300 mA	33.2 V	40.0 V	-	-	189 lm/W	>80
QLE G3 520x246mm 2500lm 850 ADV-SE	28004936	850/359	-	2,180 lm	300 mA	33.2 V	40.0 V	-	-	189 lm/W	>80
QLE G3 520x246mm 2500lm 865 ADV-SE	28004937	865/359	-	2,160 lm	300 mA	33.2 V	40.0 V	-	-	188 lm/W	>80
Operating mode NM											
QLE G3 520x246mm 2500lm 830 ADV-SE	28004934	830/359	2,220 lm	2,360 lm	350 mA	33.5 V	40.4 V	13.7 W	162 lm/W	174 lm/W	>80
QLE G3 520x246mm 2500lm 840 ADV-SE	28004935	840/359	2,490 lm	2,530 lm	350 mA	33.5 V	40.4 V	13.7 W	181 lm/W	187 lm/W	>80
QLE G3 520x246mm 2500lm 850 ADV-SE	28004936	850/359	2,490 lm	2,530 lm	350 mA	33.5 V	40.4 V	13.7 W	181 lm/W	187 lm/W	>80
QLE G3 520x246mm 2500lm 865 ADV-SE	28004937	865/359	2,480 lm	2,510 lm	350 mA	33.5 V	40.4 V	13.7 W	180 lm/W	186 lm/W	>80
Operating mode HO											
QLE G3 520x246mm 2500lm 830 ADV-SE	28004934	830/359	-	3,430 lm	525 mA	34.5 V	41.4 V	-	-	165 lm/W	>80
QLE G3 520x246mm 2500lm 840 ADV-SE	28004935	840/359	-	3,690 lm	525 mA	34.5 V	41.4 V	-	-	177 lm/W	>80
QLE G3 520x246mm 2500lm 850 ADV-SE	28004936	850/359	-	3,690 lm	525 mA	34.5 V	41.4 V	-	-	177 lm/W	>80
QLE G3 520x246mm 2500lm 865 ADV-SE	28004937	865/359	-	3,660 lm	525 mA	34.5 V	41.4 V	-	-	175 lm/W	>80

② If mounted with M4 screws with 7 mm head diameter.

③ HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output.

④ The detailed explanation, see data sheet section 1.1.

⑤ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

⑥ Measurement uncertainty ± 10 %. Based on calculation.

⑦ Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

ACL CLIP 4.3mm


Accessory



Product description

- _ Clip for fixation of LED modules with 4.3 mm holes
- _ Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- _ For drilling hole 4 mm
- _ Clip made of polycarbonate
- _ Minimum sales quantity 500 pcs.

Website
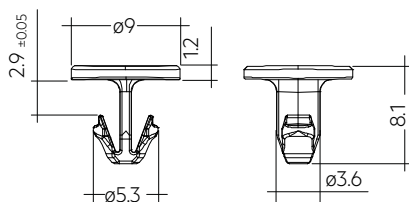
<http://www.tridonic.com/28001036>


Ordering data

Type	Article number	Colour	Packaging, bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg

① Minimum sales quantity 500 pcs.

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 359

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 % 9 ≥ 90 %

1.2 Risk group

Forward current	Risk group (IEC 62471)
660 mA (Imax)	RG1

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 45 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

QLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with QLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



QLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the QLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness. If a wire breaks or a complete module fails then the current passing through the other module increases. This may reduce its life considerably.

The max. permissible output current of the LED driver for parallel wiring is 2.1 A.


QLE modules can be operated either from SELV LED drivers or from LED drivers with LV output voltage.



QLE modules are basic insulated up to 420 V (if mounted with M4 screws with head diameter of 7 mm) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the led control gear (also against earth) is above 420 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.


At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring

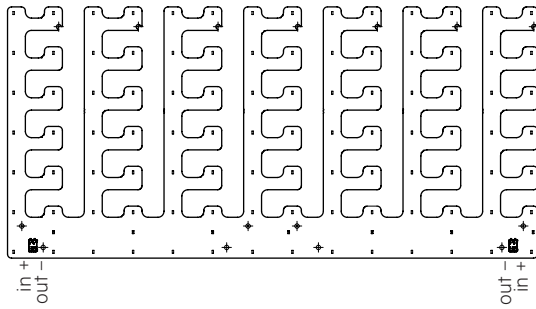

3.5 Wiring type and cross section


For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm².
For the push-wire connection you have to strip the insulation (7–9 mm).




Inserting stranded wires / removing wires by lightly pressing on the push button.

Wiring examples

Serial wiring:

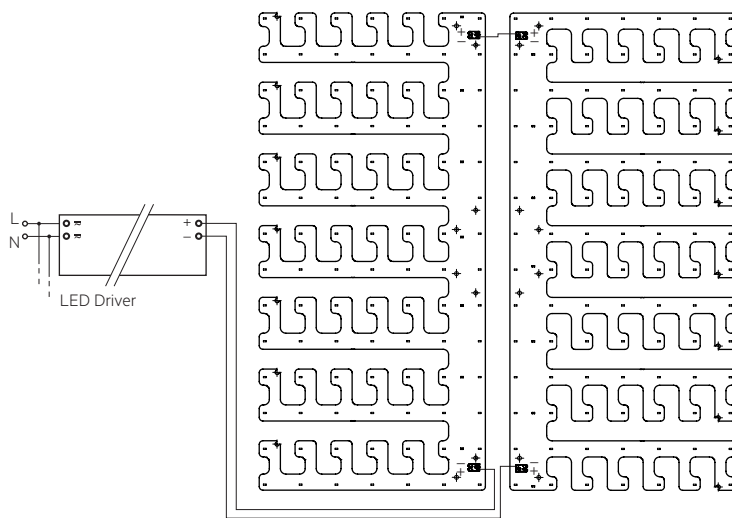

Parallel wiring:

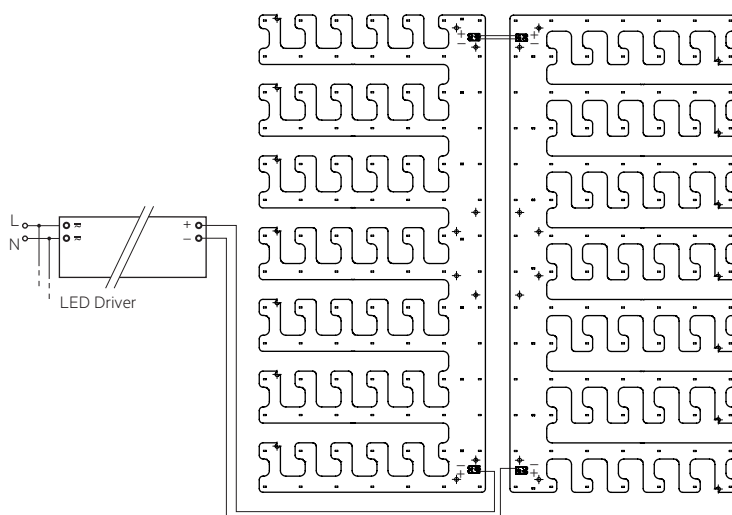

3.4 Mounting instruction



None of the components of the QLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.


The LED modules are mounted with M4 screws or ACL CLIP 4.3mm per module.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

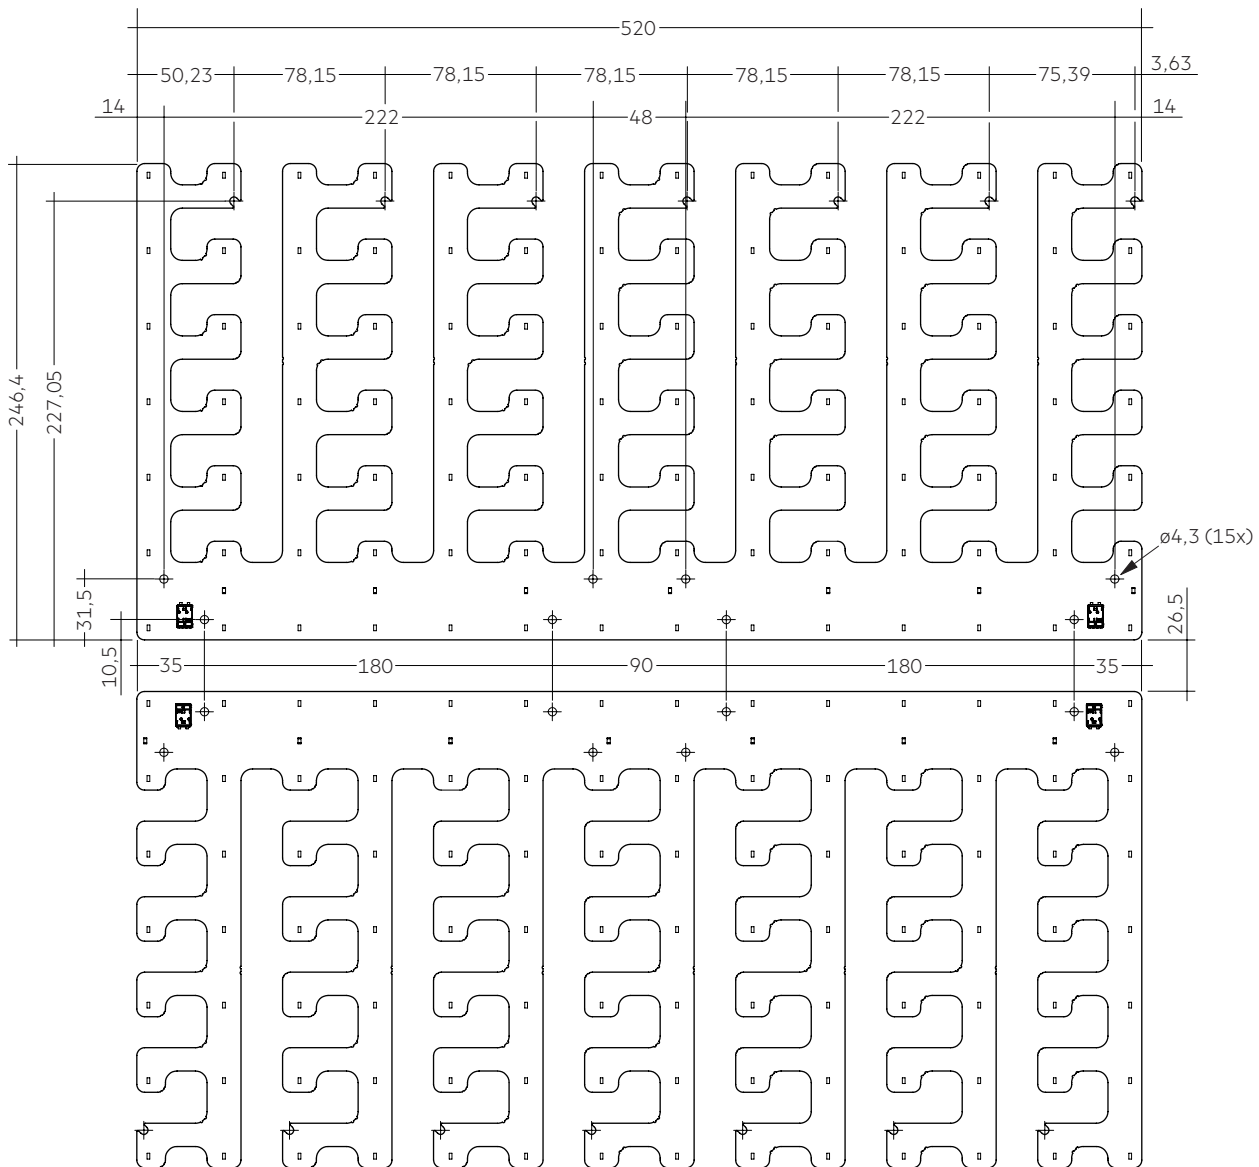

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux.

This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

4.2 Lumen maintenance for LLE 24mm HV ADV6

Forward current	tp						
	tempera- ture	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
350 mA	45 °C	39k h	43k h	>60k h	>60k h	>60k h	>60k h
	55 °C	29k h	33k h	>60k h	>60k h	>60k h	>60k h
	65 °C	29k h	33k h	>60k h	>60k h	>60k h	>60k h
	75 °C	29k h	33k h	>60k h	>60k h	>60k h	>60k h
	85 °C	25k h	28k h	57k h	>60k h	>60k h	>60k h
525 mA	45 °C	33k h	35k h	>60k h	>60k h	>60k h	>60k h
	55 °C	28k h	29k h	59k h	>60k h	>60k h	>60k h
	65 °C	28k h	29k h	59k h	>60k h	>60k h	>60k h
	75 °C	28k h	29k h	59k h	>60k h	>60k h	>60k h
	85 °C	23k h	25k h	49k h	53k h	>60k h	>60k h

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 CI 10.3.3

30 s on / 30 s off at a forward current of 700 mA

5. Electrical values

5.1 Declaration of electrical parameters


Irated ... Nominal operating current the module is designed for.

I_{max} ... Max. permissible continuous operating current incl. the tolerances of the LED driver.


Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.

Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current

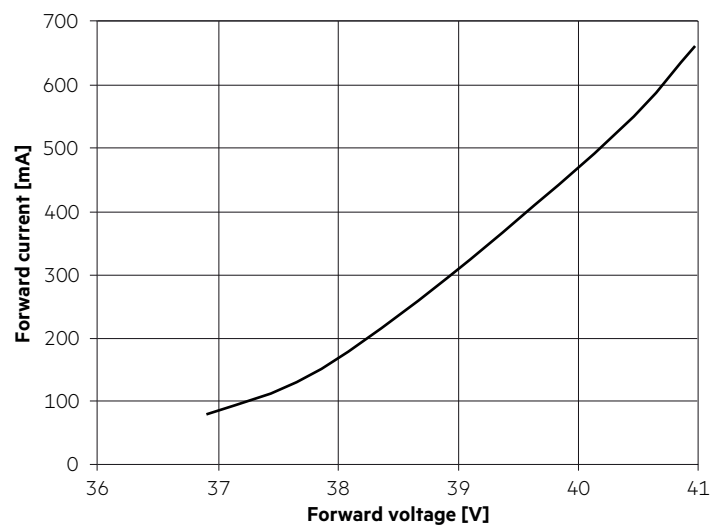

5.2 Forward voltage vs. tp temperature

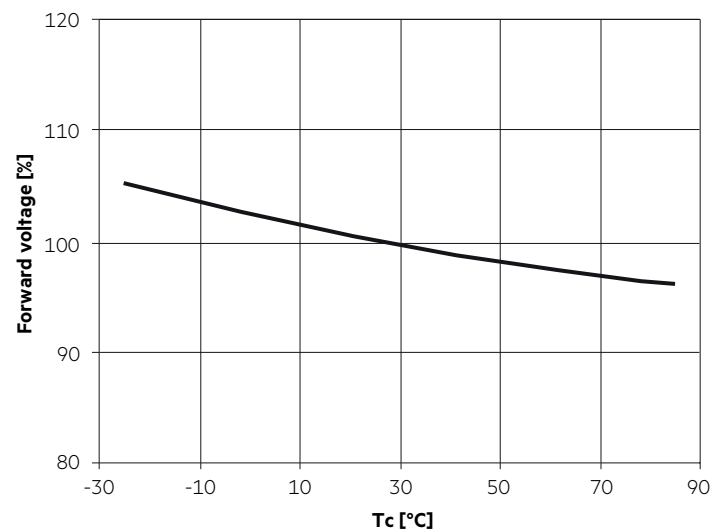

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integrally during a current pulse, see table colour coordinates and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .


3,000 K

	x0	y0
Centre at 350 mA	0.4341	0.4021
Centre at 1,050 mA	0.4339	0.4032

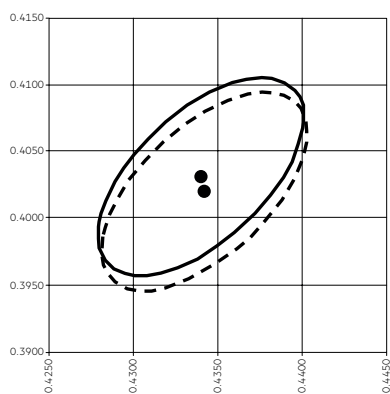


— MacAdam Ellipse: 3SDCM (1,050 mA)

- - MacAdam Ellipse: 3SDCM (350 mA)

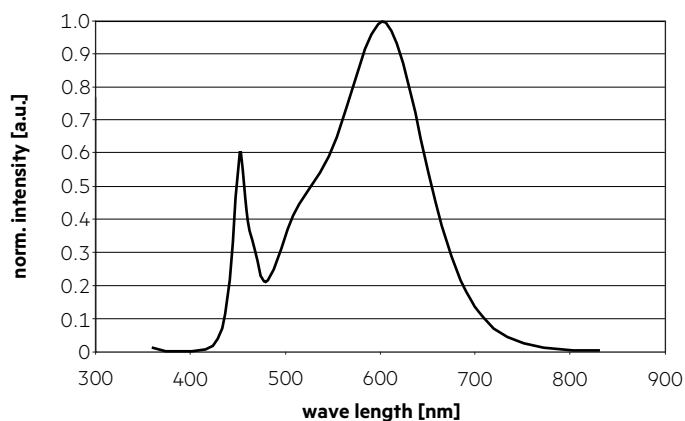


4,000 K

	x0	y0
Centre at 350 mA	0.3820	0.3785
Centre at 1,050 mA	0.3818	0.3796

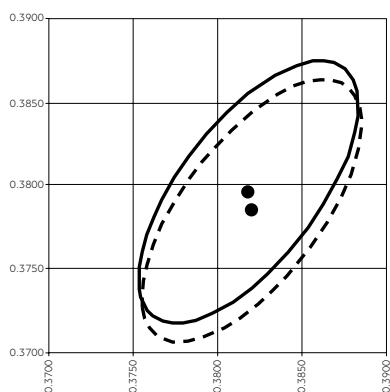


— MacAdam Ellipse: 3SDCM (1,050 mA)

- - MacAdam Ellipse: 3SDCM (350 mA)

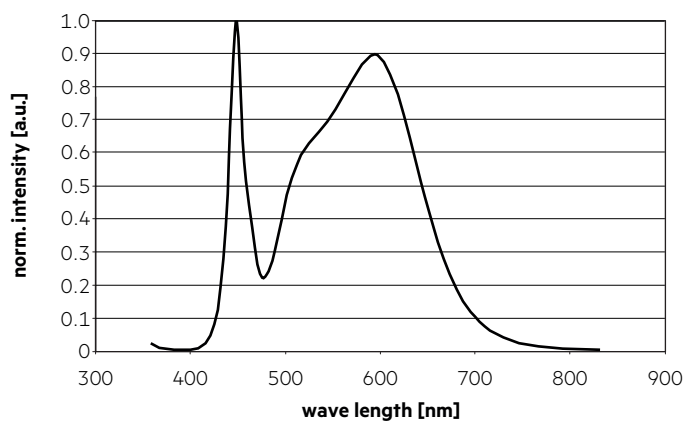


5,000 K

	x0	y0
Centre at 350 mA	0.3448	0.3540
Centre at 1,050 mA	0.3446	0.3551

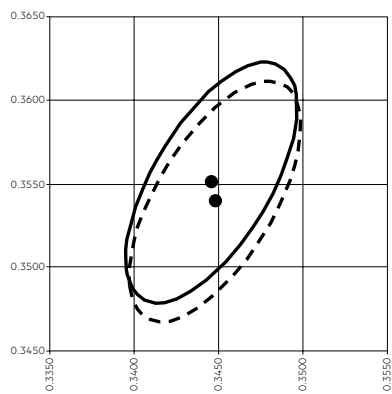


— MacAdam Ellipse: 3SDCM (1,050 mA)

- - MacAdam Ellipse: 3SDCM (350 mA)

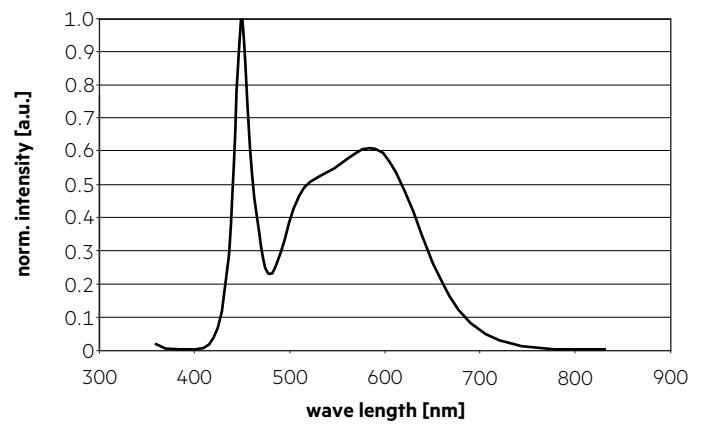
**6,500 K**

	x0	y0
Centre at 350 mA	0.3125	0.3271
Centre at 1,050 mA	0.3123	0.3282

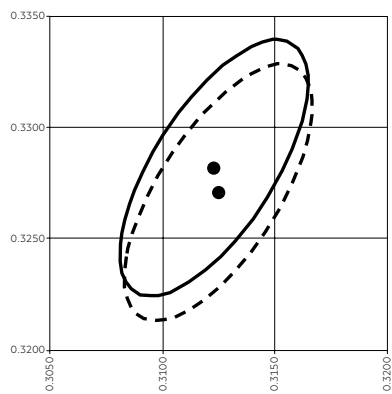


— MacAdam Ellipse: 3SDCM (1,050 mA)

- - MacAdam Ellipse: 3SDCM (350 mA)

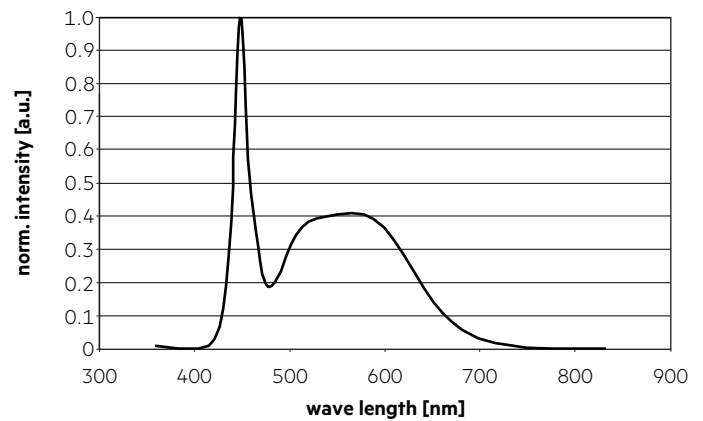


6.2 Light distribution

The optical design of the QLE product line ensures optimum homogeneity for the light distribution.

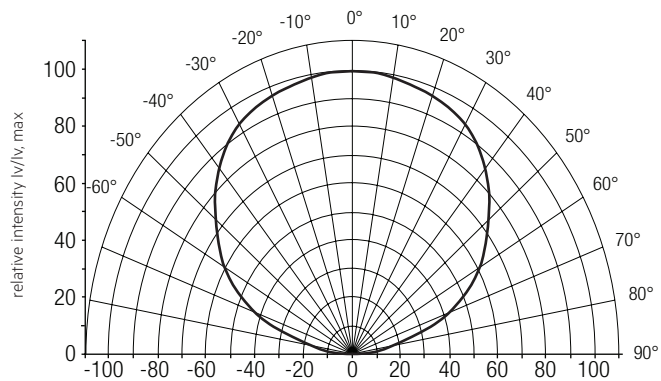


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 6 cm) should be used. Designed for typical area luminaires like 600 x 600 mm troffer fittings. Special applications like illuminated ceilings must be evaluated individually.

6.3 Relative luminous flux vs. tc temperature

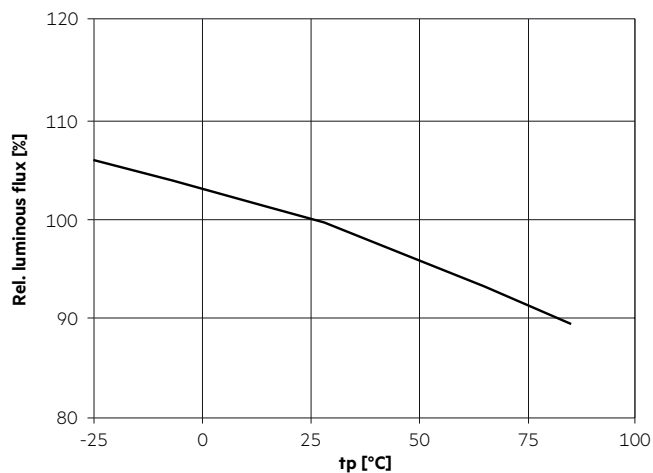

6.4 Relative luminous flux vs. operating current

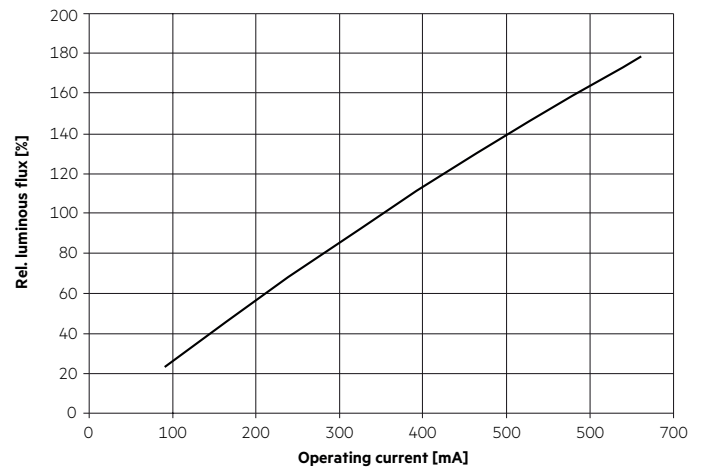

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.