



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-537 REV: 1

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1EGW/S150 ECN : Page: 1/5

■ Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- IC compatible/Low power consuming


■ Descriptions :

- The 339-1 LED lamps contain two integral chips and is available as both bicolor and bipolar types.
- The Orange Light and Green light is emitted by diodes of GaAsP/GaP and GaP respectively.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

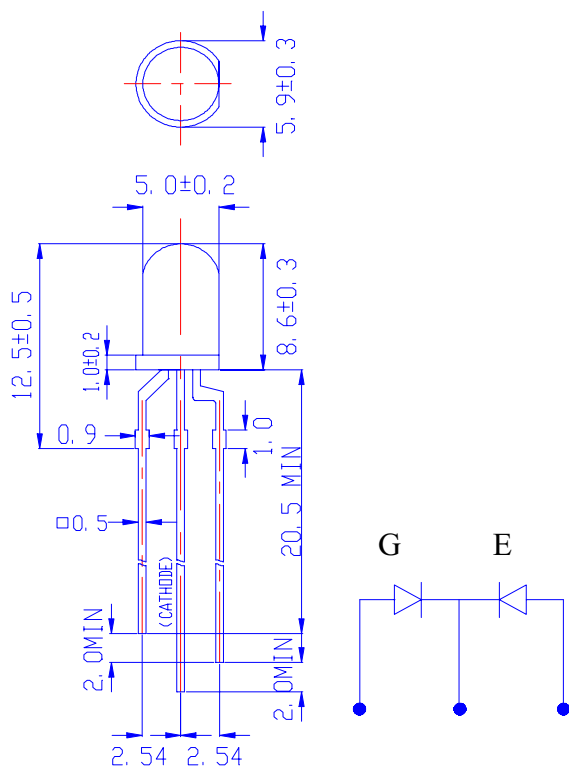

■ Notes :

- 1.All dimensions are in millimeters.
- 2.An epoxy meniscus may extend about 1.mm(0.059") down to the lead.

PART NO	Chip		Lens Color
	Material	Emitted Color	
339-1EGW/S150	GaAsP/GaP	Orange	White Diffused
	GaP	Green	

OFFICE : NO 25,Lane 76,Chung Yang Rd,Sec.3 Tucheng, Taipei 236, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2266-9936 (22 Lines)

FAX : 886-2-2267-6189

<http://www.everlight.com>



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-537 REV: 1

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1EGW/S150 ECN : Page: 2/5

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	E 30	mA
		G 30	
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	E 100	mW
		G 100	
Peak Forward Current (Duty 1/10 @ 1KHZ)	If(Peak)	E 160	mA
		G 160	
Reverse Voltage	Vr	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	E 4.0	8.0	/	mcd	If= 10 mA
		G 4.0	8.0	/		
Viewing Angle	2θ 1/2	/	90	/	deg	If= 20 mA
Peak Wavelength	λ p	E /	635	/	nm	If= 20 mA
		G /	565	/		
Dominant Wavelength	λ d	E /	625	/	nm	If= 20 mA
		G /	570	/		
Spectrum Radiation Bandwidth	△ λ	E /	45	/	nm	If= 20 mA
		G /	30	/		
Forward Voltage	Vf	E 1.7	2.0	2.4	V	If= 20 mA
		G 1.7	2.1	2.4		
Reverse Current	Ir	/	/	10	μ A	Vr= 5 V









EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-537 REV: 1

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1EGW/S150 ECN : Page: 3/5

■ Typical Electro-Optical Characteristic Curves:

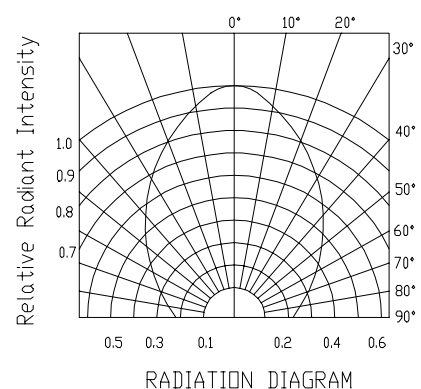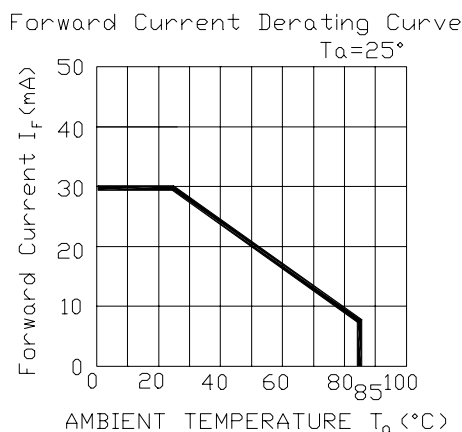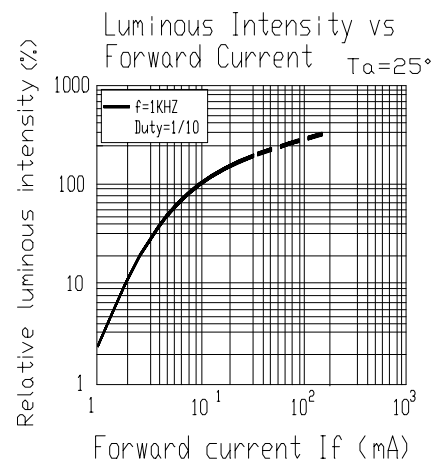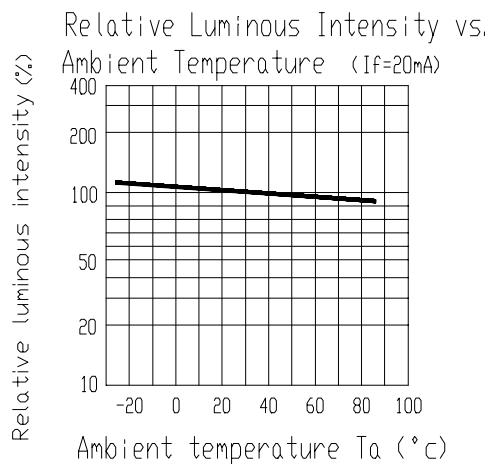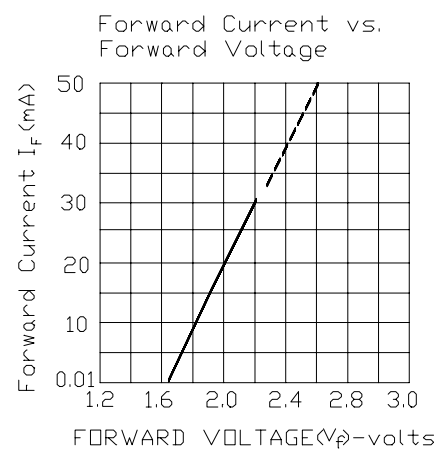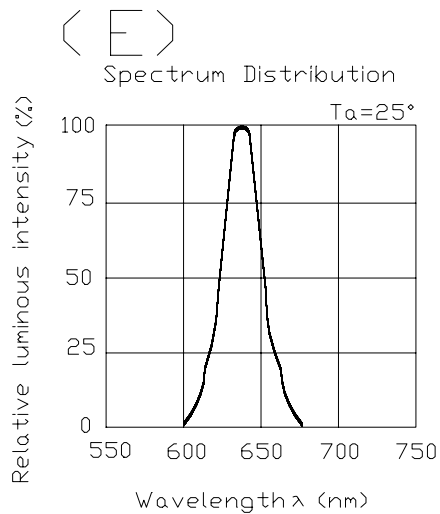



EVERLIGHT ELECTRONICS CO.,LTD.







Device Number : CDLE-033-537 REV: 1

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1EGW/S150 ECN : Page: 4/5

■ Typical Electro-Optical Characteristic Curves:

(G)

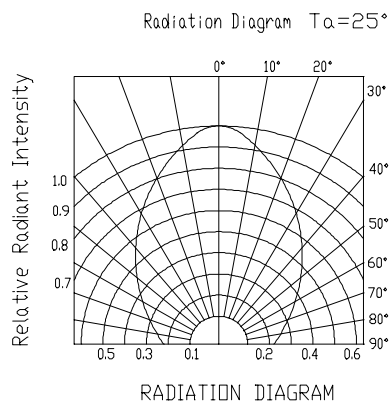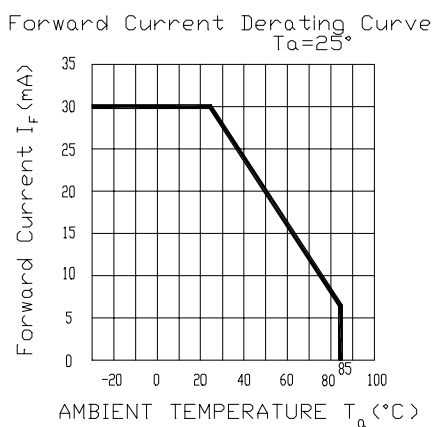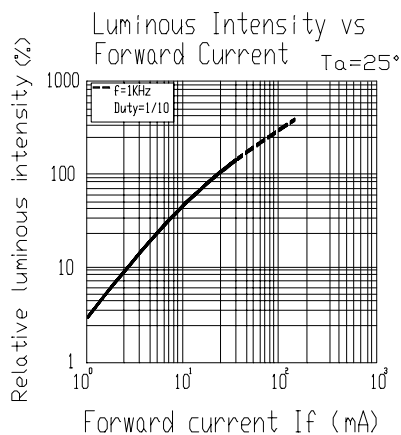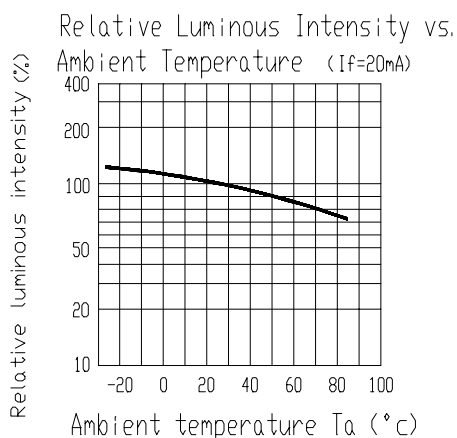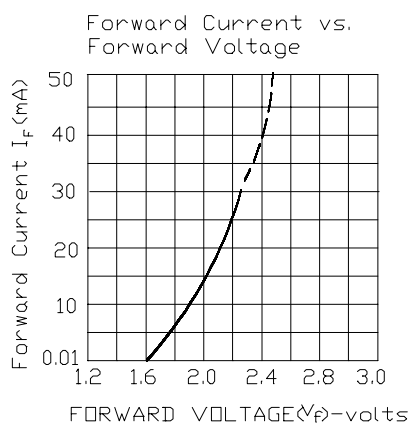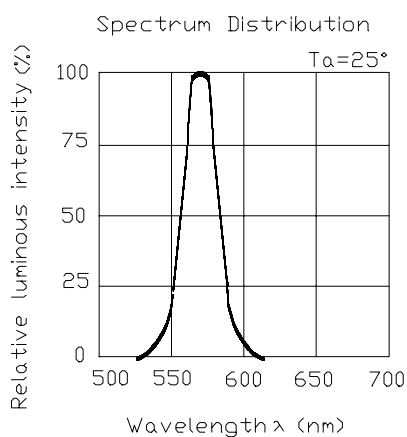



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-537 REV: 1

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1EGW/S150 ECN : Page: 5/5

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min § 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min § 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1